


LP-R707GPY6XXS

7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle Lock.

LPR707GPY6XXS_PFD_ENB01W

Features

- **Perforate Frame (GPY)**, Tempered Glass (5.00 mm) and perforated frame combine security and ventilation.
- Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatically painted.
- Internal equipment can be supervised through the glass.
- Robust swing handle.
- 600 mm width suitable for 7000 Series ServerRack.
- Can be installed so it can be opened left or right wise.

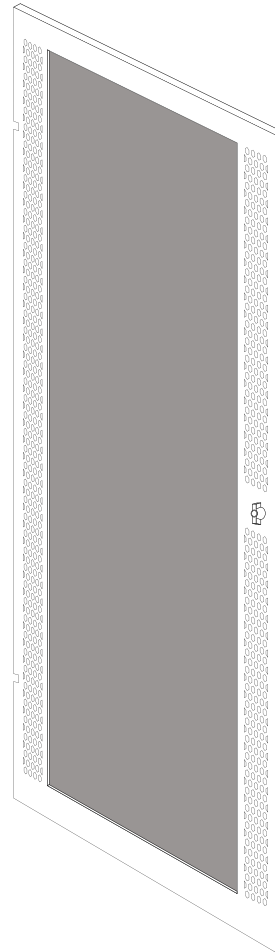

Note:

This picture shows a typical ServerRack Cabinet door, the actual lock/handle mechanism can vary from that shown.



**(LP-R707GPY)
Perforated External
Frame Glass Door**

LP-R707GPY6XXS 7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle lock.

The LP-R707GPY6XXS Perforated External Frame Glass Door for 7000 Series ServerRack, combine security and ventilation and is suitable for mixed equipment environments not generating excess heat.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend the combination of Fully Perforated front and rear doors. This configuration allows the maximum front to rear air flow through the cabinet.



A Specifications

7000 Series	LP-R707GPY6XXS Perforated External Frame Glass Doors
Standards Compliance	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
Material	<ul style="list-style-type: none"> ● SPCC cold rolled steel ● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2mm ● 5 mm tempered glass
Widths	600 mm for 7000 Series ServerRack Cabinet
Heights	For 600mm width ServerRack: 18 U, 22 U, 27 U, 32 U, 37 U, 42 U and 47 U
Type of door	GPY Perforated External Frame Tempered
Surface treatment	Degreasing, acid pickling, phosphoric, dip-coat primed
Surface finish	Static paint powder coat, Color: Ral9004, RAI7044
Degree of protection	IP20
Swing Handle	UL-94HB rated

B How to order

LP-R707GPY618S	7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle lock, Width: 600 mm, Height: 18 U.
LP-R707GPY622S	7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle lock, Width: 600 mm, Height: 22 U.
LP-R707GPY627S	7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle lock, Width: 600 mm, Height: 27 U.
LP-R707GPY632S	7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle lock, Width: 600 mm, Height: 32 U.
LP-R707GPY637S	7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle lock, Width: 600 mm, Height: 37 U.
LP-R707GPY642S	7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle lock, Width: 600 mm, Height: 42 U.
LP-R707GPY647S	7000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle lock, Width: 600 mm, Height: 47 U.

LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.