


## LP-R707GPY8XXS 7000 Series NetworkRack cabinet perforated external frame glass doors with Swing Handle Lock

LPR707GPY8XXS\_PFD\_ENB01W

### Features:

- Perforate Frame (GPY) Tempered Glass (5.00 mm) and perforated frame combine security and ventilation.
- Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatically painted.
- Internal equipment can be supervised through the glass.
- Robust swing handle.
- 800 mm width suitable for 7000 Series NetworkRacks.
- Can be installed so it can be opened left or right wise.

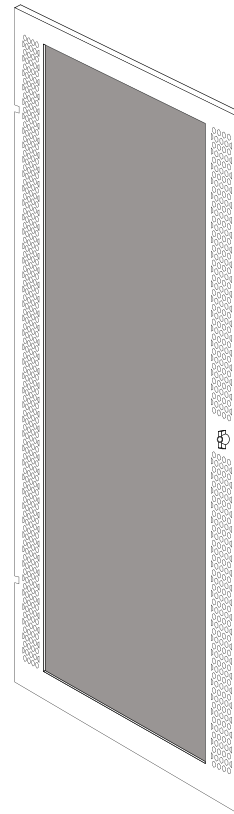

(LP-R707GPY)  
Perforated External  
Frame Glass Door



**Note:**  
This picture shows a typical NetworkRack Cabinet door, the actual lock/handle mechanism can vary from that shown.

## LP-R707GPY8XXS 7000 Series NetworkRack cabinet perforated external frame glass doors with Swing Handle Lock

The **LP-R707GPY8XXS** Perforated External Frame Glass Doors for 7000 Series NetworkRacks, combine security and ventilation and is suitable for mixed equipment environments not generating excess heat.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend the combination of Fully Perforated front and rear doors. This configuration allows the maximum front to rear air flow through the cabinet.



**A Specifications:**

<b>7000 Series Model No.</b>	<b>LP-R707GPY8XXS</b> Perforated External Frame Glass Doors
<b>Standards Compliance</b>	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
<b>Material (main)</b>	<ul style="list-style-type: none"> <li>● SPCC cold rolled steel</li> <li>● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm</li> <li>● 5 mm tempered glass</li> </ul>
<b>Widths</b>	800 mm for 7000 Series NetworkRack Cabinets
<b>Heights</b>	37 U, 42 U y 47 U
<b>Type of door</b>	GPY Perforated external frame tempered
<b>Surface treatment</b>	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
<b>Surface finish</b>	Static paint powder coat, Color: Ral9004, RAI7044
<b>Degree of protection</b>	IP20
<b>Code lock</b>	Optional, available with 3 digit code
<b>Swing Handle</b>	UL-94HB Rated

**B How to Order:**

- LP-R707GPY837S** 7000 Series NetworkRack cabinet perforated external frame glass door with Swing Handle Lock. Width: 800 mm Height: 37 U.
- LP-R707GPY842S** 7000 Series NetworkRack cabinet perforated external frame glass door with Swing Handle Lock. Width: 800 mm Height: 42 U.
- LP-R707GPY847S** 7000 Series NetworkRack cabinet perforated external frame glass door with Swing Handle Lock. Width: 800 mm Height: 47 U.