


LP-R707PFY6XXS
7000 Series ServerRack Cabinet Fully Perforated External Frame Doors with Swing Handle Lock.

LPR707PFY6XXS_PFD_ENB01W

Features

- **Perforate Frame (PFY)**, fully perforated door frame combine security and ventilation with 64% open area.
- Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatically painted.
- Internal equipment can be supervised through the glass.
- Robust swing handle.
- 600 mm width suitable for 7000 Series ServerRack.
- Can be installed so it can be opened left or right wise.

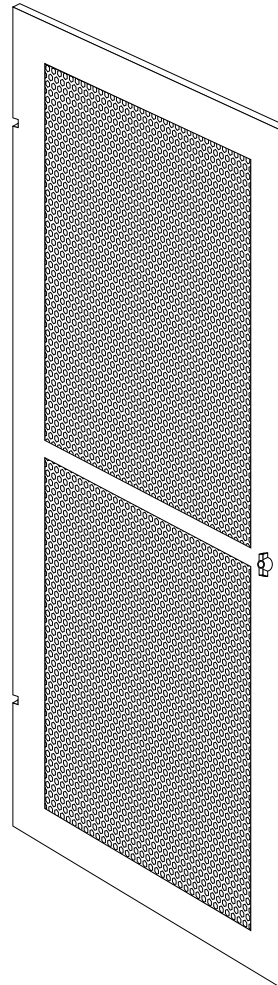

Note:
This picture shows a typical ServerRack Cabinet door, the actual lock/handle mechanism can vary from that shown.



**(LP-R707PFY)
Full Perforated
External Door**

**LP-R707PFY6XXS
7000 Series ServerRack Cabinet
Fully Perforated External Frame Doors
with Swing Handle lock.**

The LP-R707PFY6XXS Fully Perforated External Frame Doors for 7000 Series ServerRack, combine security and ventilation and is suitable for mixed equipment environments not generating excess heat.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend the combination of Fully Perforated front and rear doors. This configuration allows the maximum front to rear air flow through the cabinet.



A Specifications

7000 Series	LP-R707PFY6XXS Fully Perforated External Frame Doors
Standards Compliance	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
Material	<ul style="list-style-type: none"> ● SPCC cold rolled steel ● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2mm
Widths	600 mm for 7000 series ServerRack Cabinet
Heights	For 600 mm width ServerRack: 18 U, 22 U, 27 U, 32 U, 37 U, 42 U and 47 U
Type of door	PFY Fully Perforated External Frame achieves 64% open area
Surface treatment	Degreasing, acid pickling, phosphoric, dip-coat primed
Surface finish	Static paint powder coat, Color: Ral9004, RAl7044
Degree of protection	IP20
Swing Handle	UL-94HB rated

B How to order

LP-R707PFY618S	7000 Series ServerRack Cabinet Fully Perforated External Door with Swing Handle lock, Width:600 mm, Height: 18 U.
LP-R707PFY622S	7000 Series ServerRack Cabinet Fully Perforated External Door with Swing Handle lock, Width:600 mm, Height: 22 U.
LP-R707PFY627S	7000 Series ServerRack Cabinet Fully Perforated External Door with Swing Handle lock, Width:600 mm, Height: 27 U.
LP-R707PFY632S	7000 Series ServerRack Cabinet Fully Perforated External Door with Swing Handle lock, Width:600 mm, Height: 32 U.
LP-R707PFY637S	7000 Series ServerRack Cabinet Fully Perforated External Door with Swing Handle lock, Width:600 mm, Height: 37 U.
LP-R707PFY642S	7000 Series ServerRack Cabinet Fully Perforated External Door with Swing Handle lock, Width:600 mm, Height: 42 U.
LP-R707PFY647S	7000 Series ServerRack Cabinet Fully Perforated External Door with Swing Handle lock, Width:600 mm, Height: 47 U.

LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.