


LP-R707PFY8XXS 7000 Series NetworkRack cabinet fully perforated external frame doors with Swing Handle Lock

LPR707PFY8XXS_PFD_ENB01W

Features:

- Perforate Frame (PFY) fully perforated door frame combine security and ventilation with 64% open area.
- Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatically painted.
- Internal equipment can be supervised through the glass
- Swing handle lock.
- 800 mm width suitable for 7000 Series NetworkRack.
- Can be installed so it can be opened left or right wise.

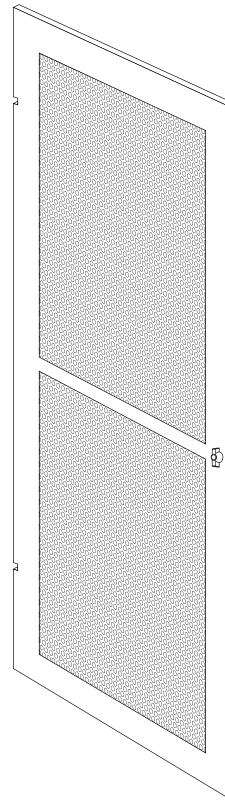

Note:
This picture shows a typical NetworkRack Cabinet door, the actual lock/handle mechanism can vary from that shown.

(LP-R707PFY)
Full Perforated
External Door

LP-R707PFY8XXS 7000 Series NetworkRack cabinet fully perforated external frame doors with Swing Handle Lock

The **LP-R707PFY8XXS** Fully Perforated External Frame Doors for 7000 Series NetworkRack, combine security and ventilation and is suitable for mixed equipment environments not generating excess heat.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend the combination of Fully Perforated front and rear doors. This configuration allows the maximum front to rear air flow through the cabinet.



A Specifications:

7000 Series Model No.	LP-R707PFY8XXS Fully Perforated External Frame Doors
Standards Compliance	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
Material (main)	<ul style="list-style-type: none"> ● SPCC cold rolled steel ● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm
Widths	800 mm for 7000 Series NetworkRack Cabinets
Heights	37 U, 42 U y 47 U
Type of door	PFY Fully Perforated External Frame achieves 64% open area
Surface treatment	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
Surface finish	Static paint powder coat, Color: Ral9004, RAl7044
Degree of protection	IP20
Code lock	Optional, available with 3 digit code
Swing Handle	UL-94HB rated

B How to Order:

LP-R707PFY837S	7000 Series NetworkRack cabinet fully perforated external frame door with Swing Handle Lock, Width: 800 mm Height: 37 U.
LP-R707PFY842S	7000 Series NetworkRack cabinet fully perforated external frame door with Swing Handle Lock, Width: 800 mm Height: 42 U.
LP-R707PFY847S	7000 Series NetworkRack cabinet fully perforated external frame door with Swing Handle Lock, Width: 800 mm Height: 47 U.