


LP-R807CPY6XXC 8000 Series ServerRack cabinet perforated external curved doors with 3 digits combination lock

LPR807CPY6XXC_PFD_ENB01W

Features:

- Perforated External Curved Door (**CPY**) combine security and ventilation. Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatic painted.
- 600 mm width suitable for 8000 Series ServerRacks.
- Can be installed so it can be opened left or right-wise.
- Robust 3 digit coded combination lock.

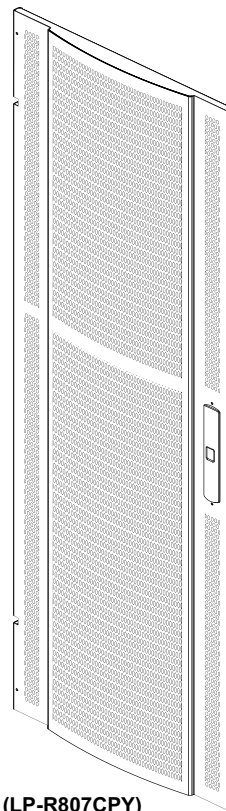

(LP-R807CPY)
Perforate External
Curve Door

LP-R807CPY6XXC 8000 Series ServerRack cabinet perforated external curved doors with 3 digits combination lock

The **LP-R807CPY6XXC** perforated external frame glass doors for 8000 Series ServerRacks with 3 digits combination locks, combine security and ventilation.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. These doors are suitable for mixed equipment environments not generating excess heat.



A Specifications:

8000 Series Model No.	LP-R807CPY6XXC Perforated external curved door (CPY)
Standards Compliance	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
Material (main)	<ul style="list-style-type: none"> ● SPCC cold rolled steel ● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm
Widths	600 mm for 8000 Series ServerRack Cabinets
Heights	42 U and 45 U
Type of door	(CPY) Perforated external curved door
Surface treatment	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
Surface finish	Static paint powder coat, Color: Ral9004, RAI7044
Degree of protection	IP20
Code locks	With 3 digits combination lock

B How to Order:

LP-R807CPY642C	Perforated external curved door, ServerRack 8000 Series, width: 600 mm, height: 42 U, with 3 digits combination lock.
LP-R807CPY645C	Perforated external curved door, ServerRack 8000 Series, width: 600 mm, height: 45 U, with 3 digits combination lock.