


## LP-R807DPY6XXS 8000 Series ServerRack cabinet perforated external double doors with swing handle lock

LPR807DPY6XXS\_PFD\_ENB01W

### Features:

- **DPY** Perforated external double door with swing handle lock combine security, convenient access and ventilation. Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Lower foot print.
- Electrostatic painted.
- 600 mm width suitable for 8000 Series ServerRacks.
- Two doors that swing open at the center to each side.
- Robust swing handle lock.

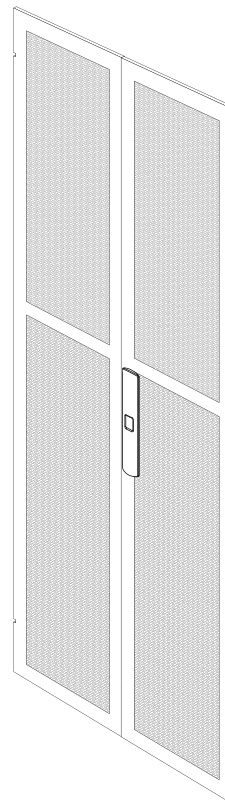

(LP-R807DPY)  
Perforated  
External Double Door



#### Note:

This picture shows a typical ServerRack Cabinet door, the actual lock/handle mechanism can vary from that shown.

## LP-R807DPY6XXS 8000 Series ServerRack cabinet perforated external double doors with swing handle lock

The **LP-R807DPY6XXS** Perforated external frame double doors for 8000 Series ServerRacks with swing handle locks, combine security, convenience and ventilation, they have a lower frontal footprint due to the split door setup.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. These doors are suitable for mixed equipment environments not generating excess heat.



**A Specifications:**

<b>8000 Series Model No.</b>	<b>LP-R807DPY6XXS</b> 8000 Series ServerRack Cabinet Perforated External Double Doors with swing handle lock
<b>Standards Compliance</b>	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
<b>Material (main)</b>	<ul style="list-style-type: none"> <li>● SPCC cold rolled steel</li> <li>● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm</li> </ul>
<b>Widths</b>	600 mm for 8000 Series ServerRack Cabinets
<b>Heights</b>	27 U, 39 U, 42 U and 45 U
<b>Type of door</b>	DPY Perforated external double doors
<b>Surface treatment</b>	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
<b>Surface finish</b>	Static paint powder coat, Color: Ral9004, RAI7044
<b>Degree of protection</b>	IP20
<b>Swing Handle</b>	UL-94HB rated

**B How to Order:**

<b>LP-R807DPY627S</b>	8000 Series ServerRack Cabinet Perforated External Double Doors with Swing Handle Lock Width: 600 mm, Height: 27 U.
<b>LP-R807DPY639S</b>	8000 Series ServerRack Cabinet Perforated External Double Doors with Swing Handle Lock Width: 600 mm, Height: 39 U.
<b>LP-R807DPY642S</b>	8000 Series ServerRack Cabinet Perforated External Double Doors with Swing Handle Lock Width: 600 mm, Height: 27 U.
<b>LP-R807DPY645S</b>	8000 Series ServerRack Cabinet Perforated External Double Doors with Swing Handle Lock Width: 600 mm, Height: 27 U.