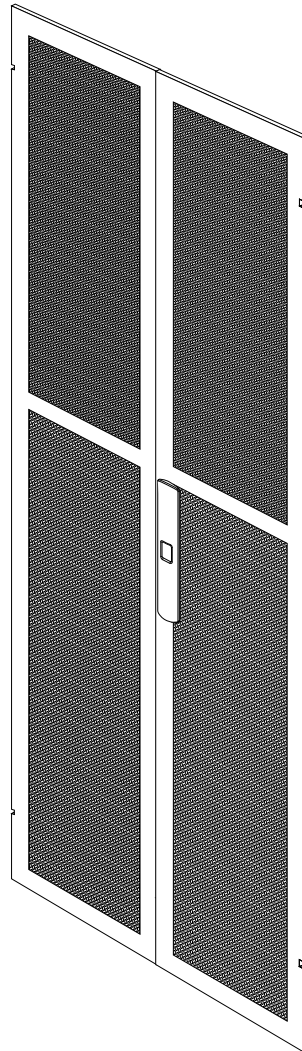


LP-R807DPY8XXS 8000 Series NetworkRack Cabinet Perforated External Double Doors with Swing Handle Lock.

LPR807DPY8XXS_PFD_ENB01W

Features

- **DPY** Perforated External Double Door with swing handle lock combine security, convenient access and ventilation. Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Lower foot print.
- Electrostatic painted.
- 800 mm width suitable for 8000 Series NetworkRack.
- Two doors that swing open at the center to each side.
- Robust swing handle lock.

**8000 Series**

(LP-R807DPY) Perforated External Double Door

Note:

This picture shows a typical NetworkRack Cabinet door, the actual lock/handle mechanism can vary from that shown.

LP-R807DPY8XXS 8000 Series NetworkRack Cabinet Perforated External Double Doors with Swing Handle Lock.

The **LP-R807DPY8XXS** Perforated External Frame Double Doors for 8000 Series NetworkRack with swing handle lock, combine security, convenience and ventilation, they have a lower frontal footprint due to the split door setup.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. These doors are suitable for mixed equipment environments not generating excess heat.

A Specifications

8000 Series Model No.	LP-R807DPY8XXS Perforated External Double Doors with swing handle lock
Standards Compliance	ANSI/EIA RS-310-D, IEC-297-2, DIN41494 Part 1, DIN41494 PART7, GB/T3047, 2.92, RoHS.
Material (main)	* SPCC cold rolled steel. * Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm.
Width	800 mm for 8000 Series NetworkRack Cabinets.
Heights	27 U, 39 U, 42 U and 45 U.
Type of door	DPY Perforated External Double Doors.
Surface treatment	Surface: degreasing, acid pickling, phosphoric, dio-coat primed.
Surface finish	Static paint powder coat, Color: RaI9004, RAI7044.
Degree of protection	IP 20
Swing Handle	UL-94HB rated

B How to Order

LP-R807DPY827S	8000 Series NetworkRack Perforated External Double Door with Swing Handle Lock, Width: 800 mm, Height: 27 U.
LP-R807DPY839S	8000 Series NetworkRack Perforated External Double Door with Swing Handle Lock, Width: 800 mm, Height: 39 U.
LP-R807DPY842S	8000 Series NetworkRack Perforated External Double Door with Swing Handle Lock, Width: 800 mm, Height: 42 U.
LP-R807DPY845S	8000 Series NetworkRack Perforated External Double Door with Swing Handle Lock, Width: 800 mm, Height: 45 U.

LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.