


## LP-R807GPY6XXC 8000 Series ServerRack cabinet perforated external frame glass doors with 3 digits combination lock

LPR807GPY6XXC\_PFD\_ENB01W

### Features:

- Perforated Frame: (**GPY**) Tempered Glass (5.00 mm) and perforated frame combine security and ventilation. Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatic painted.
- Internal equipment can be supervised through the glass
- 600 mm width suitable for 8000 series ServerRacks.
- Can be installed so it can be opened left or right-wise.
- Robust 3 digit coded combination lock.

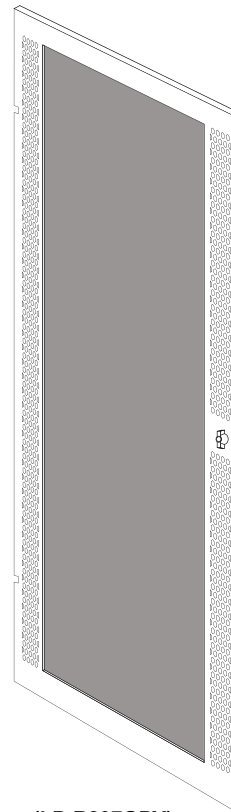

(LP-R807GPY)  
Perforated External  
Frame Glass Door

## LP-R807GPY6XXC 8000 Series ServerRack cabinet perforated external frame glass doors with 3 digits combination lock

The **LP-R807GPY6XXC** Perforated External Frame Glass Doors for series 8000 ServerRacks with 3 digit combination locks, combine security and ventilation.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. These doors are suitable for mixed equipment environments not generating excess heat.



**A Specifications:**

<b>8000 Series Model No.</b>	<b>LP-R807GPY6XXC</b> Perforated external frame glass doors with 3 digits combination lock
<b>Standards Compliance</b>	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
<b>Material (main)</b>	<ul style="list-style-type: none"> <li>● SPCC cold rolled steel</li> <li>● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm</li> </ul>
<b>Widths</b>	600 mm for 8000 Series ServerRack Cabinets
<b>Heights</b>	27 U, 39 U, 42 U and 45 U
<b>Type of door</b>	GPY Plain External Solid Doors
<b>Surface treatment</b>	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
<b>Surface finish</b>	Static paint powder coat, Color: Ral9004, RAI7044
<b>Degree of protection</b>	IP20
<b>Code locks</b>	With 3 digits combination lock

**B How to Order:**

<b>LP-R807GPY627C</b>	Perforated external frame glass door, ServerRack 8000 Series, width: 600 mm, height: 27 U, with 3 digits combination lock.
<b>LP-R807GPY639C</b>	Perforated external frame glass door, ServerRack 8000 Series, width: 600 mm, height: 39 U, with 3 digits combination lock.
<b>LP-R807GPY642C</b>	Perforated external frame glass door, ServerRack 8000 Series, width: 600 mm, height: 42 U, with 3 digits combination lock.
<b>LP-R807GPY645C</b>	Perforated external frame glass door, ServerRack 8000 Series, width: 600 mm, height: 45 U, with 3 digits combination lock.

*LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.*