


LP-R807GPY6XXS 8000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle Lock

LPR807GPY6XXS_PFD_ENB01W

Features:

- Perforated Frame (GPY) Tempered Glass (5.0 mm) and perforated frame combine security and ventilation. Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatic painted.
- Internal equipment can be supervised through the glass.
- 600 mm width suitable for 8000 series ServerRack.
- Can be installed so it can be opened left or right-wise.
- Robust swing handle lock.

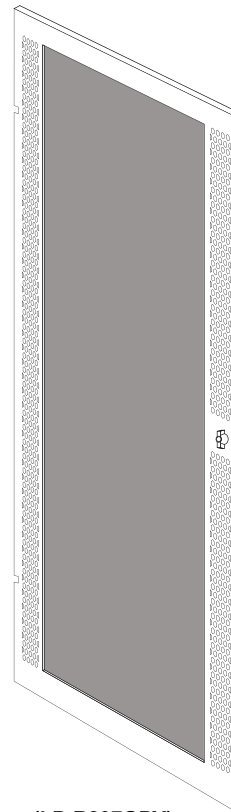

(LP-R807GPY)
Perforated External
Frame Glass Door



Note:

This picture shows a typical ServerRack Cabinet door, the actual lock/handle mechanism can vary from that shown.

LP-R807GPY6XXS 8000 Series ServerRack Cabinet Perforated External Frame Glass Doors with Swing Handle Lock

The **LP-R807GPY6XXS** Perforated External Frame Glass Doors for 8000 Series ServerRacks with swing handle locks, combine security and ventilation.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. These doors are suitable for mixed equipment environments not generating excess heat.



A Specifications:

8000 Series Model No.	LP-R807GPY6XXS Perforated external frame glass doors with 3 digits combination lock
Standards Compliance	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
Material (main)	<ul style="list-style-type: none"> • SPCC cold rolled steel • Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm • 5 mm Tempered glass
Widths	600 mm for 8000 Series ServerRack Cabinets
Heights	27 U, 39 U, 42 U and 45 U
Type of door	GPY Perforated External Frame Doors
Surface treatment	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
Surface finish	Static paint powder coat, Color: RaI9004, RAI7044
Degree of protection	IP20
Code lock	Optional, available with 3 digit code
Swing Handle	UL-94HB rated

B How to Order:

LP-R807GPY627S	8000 Series ServerRack Cabinet Perforated External Frame Glass Door with Swing Handle Lock, Width: 600 mm, Height: 27 U.
LP-R807GPY639S	8000 Series ServerRack Cabinet Perforated External Frame Glass Door with Swing Handle Lock, Width: 600 mm, Height: 39 U.
LP-R807GPY642S	8000 Series ServerRack Cabinet Perforated External Frame Glass Door with Swing Handle Lock, Width: 600 mm, Height: 42 U.
LP-R807GPY645S	8000 Series ServerRack Cabinet Perforated External Frame Glass Door with Swing Handle Lock, Width: 600 mm, Height: 45 U.

LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.