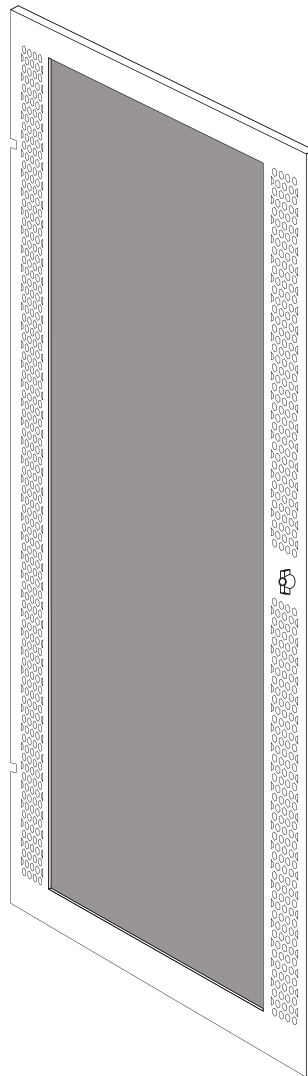


## LP-R807GPY8XXS 8000 Series NetworkRack Cabinet Perforated External Frame Glass Doors with Swing Handle Lock.

LPR807GPY8XXS\_PFD\_ENB01W

### Features

- **(GPY) Perforated Frame door:** Tempered Glass (5.00 mm) and perforated frame with swing handle lock combine security and ventilation. Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatically painted.
- 800 mm width suitable for 8000 Series NetworkRack.
- Can be installed so it can be opened left or right-wise.
- Robust swing handle lock.

**8000 Series**

**(LP-R807GPY)  
Perforated External  
Frame Glass Door**

**Note:**

*This picture shows a typical NetworkRack Cabinet door, the actual lock/handle mechanism can vary from that shown.*

## LP-R807GPY8XXS 8000 Series NetworkRack Cabinet Perforated External Frame Glass Doors with Swing Handle Lock.

The **LP-R807GPY8XXS** Perforated External Frame Glass Doors for 8000 Series NetworkRack with swing handle lock, combine security and ventilation.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. These doors are suitable for mixed equipment environments not generating excess heat.

## A Specifications

| 8000 Series Model No. | LP-R807GPY8XXS Perforated External Frame Glass Door with swing handle lock.                  |
|-----------------------|--|
| Standards Compliance  | ANSI/EIA RS-310-D, IEC-297-2, DIN41494 Part 1, DIN41494 PART7, GB/T3047, 2.92, RoHS.         |
| Material (main)       | * SPCC cold rolled steel.<br>* Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm. |
| Width                 | 800 mm for 8000 Series NetworkRack Cabinets.   |
| Heights               | 27 U, 39 U, 42 U and 45 U.   |
| Type of door          | GPY Perforated External Frame Glass Doors.   |
| Surface treatment     | Surface: degreasing, acid pickling, phosphoric, dio-coat primed.                             |
| Surface finish        | Static paint powder coat, Color: RaI9004, RAI7044.   |
| Degree of protection  | IP 20  |
| Swing Handle          | UL-94HB rated  |

## B How to Order

|                       |   |
|-----------------------|---|
| <b>LP-R807GPY827S</b> | 8000 Series NetworkRack Perforated External Frame Glass Door with Swing Handle Lock, Width: 800 mm, Height: 27 U. |
| <b>LP-R807GPY839S</b> | 8000 Series NetworkRack Perforated External Frame Glass Door with Swing Handle Lock, Width: 800 mm, Height: 39 U. |
| <b>LP-R807GPY842S</b> | 8000 Series NetworkRack Perforated External Frame Glass Door with Swing Handle Lock, Width: 800 mm, Height: 42 U. |
| <b>LP-R807GPY845S</b> | 8000 Series NetworkRack Perforated External Frame Glass Door with Swing Handle Lock, Width: 800 mm, Height: 45 U. |

*LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.*