


LP-R807GSY6XXC 8000 Series ServerRack cabinet solid external frame glass doors with 3 digit combination lock

LPR807GSY6XXC_PFD_ENB01W

Features:

- Solid Frame: (GSY) Traditional steel and glass door features 5.00 mm thick tempered glass which provides both increased security and visual access to installed equipment.
- Excellent looks.
- Electrostatically painted.
- Internal equipment can be supervised through the glass.
- 600 mm width suitable for 8000 Series ServerRacks.
- Can be installed so it can be opened left or right-wise.
- Robust 3 digit coded combination lock.

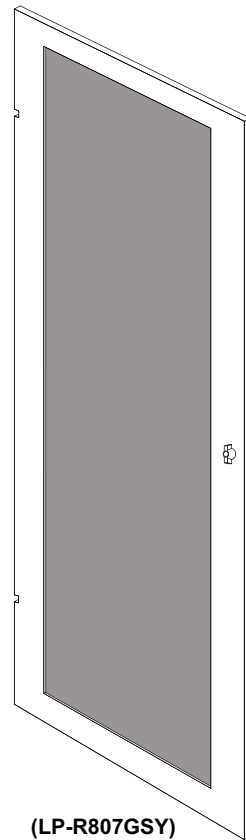

(LP-R807GSY)
Solid External
Frame Glass Door

LP-R807GSY6XXC 8000 Series ServerRack cabinet solid external frame glass doors with 3 digit combination lock

The **LP-R807GSY6XXC** Solid external frame glass doors for Series 8000 ServerRacks with 3 digit combination locks, combine security visibility and is suitable for mixed equipment environments.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend the use of forced ventilation as there is no air circulation through this type of door.



A Specifications:

8000 Series Model No.	LP-R807GSY6XXC solid external frame glass doors with 3 digit combination lock
Standards Compliance	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
Material (main)	<ul style="list-style-type: none"> ● SPCC cold rolled steel ● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm
Widths	600 mm for 8000 Series ServerRack Cabinets
Heights	27 U, 39 U, 42 U and 45 U
Type of door	GSY Solid external frame glass doors
Surface treatment	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
Surface finish	Static paint powder coat, Color: RaI9004, RAI7044
Degree of protection	IP20
Code locks	With 3 digits code combination lock

B How to Order:

LP-R807GSY627C	Solid external frame glass door, ServerRack 8000 Series, width: 600 mm, height: 27 U, with 3 digits combination lock.
LP-R807GSY639C	Solid external frame glass door, ServerRack 8000 Series, width: 600 mm, height: 39 U, with 3 digits combination lock.
LP-R807GSY642C	Solid external frame glass door, ServerRack 8000 Series, width: 600 mm, height: 42 U, with 3 digits combination lock.
LP-R807GSY645C	Solid external frame glass door, ServerRack 8000 Series, width: 600 mm, height: 45 U, with 3 digits combination lock.