


## LP-R807PFY6XXC 8000 Series ServerRack cabinet fully perforated external frame doors with combination lock

LPR807PFY6XXC\_PFD\_ENB01W

### Features

- Perforate Frame (PFY) fully perforated door frame combine security and ventilation with 64% open area.
- Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatically painted.
- Internal equipment can be supervised through the glass.
- 600 mm width suitable for 8000 Series ServerRacks.
- Can be installed so it can be opened left or right wise.
- With combination lock.

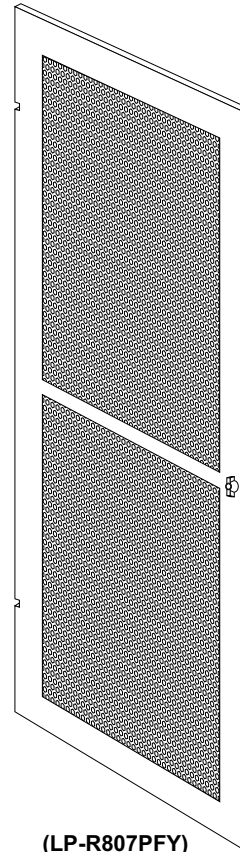

(LP-R807PFY)  
Full Perforated  
External Door

### LP-R807PFY6XXC 8000 Series ServerRack Cabinet Fully Perforated External Frame Doors with combination lock

The LP-R807PFY6XXC Fully Perforated External Frame Doors for Series 8000 ServerRacks with 3 digit combination locks, combine security and ventilation and is suitable for mixed equipment environments not generating excess heat.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend the combination of Fully Perforated front and rear doors. This configuration allows the maximum front to rear air flow through the cabinet.



**A Specifications:**

<b>8000 Series Model No.</b>	<b>LP-R807PFY6XXC</b> Fully perforated external frame doors with 3 digit combination lock
<b>Standards Compliance</b>	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
<b>Material (main)</b>	<ul style="list-style-type: none"> <li>● SPCC cold rolled steel</li> <li>● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm</li> </ul>
<b>Widths</b>	600 mm for 8000 Series ServerRack Cabinets
<b>Heights</b>	27 U, 39 U, 42 U and 45 U
<b>Type of door</b>	<b>PFY</b> Fully Perforated External Frame achieves 64% open area
<b>Surface treatment</b>	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
<b>Surface finish</b>	Static paint powder coat, Color: Ral9004, RAI7044
<b>Degree of protection</b>	IP20
<b>Code lock</b>	With 3 digit code combination lock

**B How to Order:**

<b>LP-R807PFY627C</b>	Full Perforated external Door, ServerRack 8000 Series, Width: 600 mm, Height: 27 U, with Combination Lock.
<b>LP-R807PFY639C</b>	Full Perforated external Door, ServerRack 8000 Series, Width: 600 mm, Height: 39 U, with Combination Lock.
<b>LP-R807PFY642C</b>	Full Perforated external Door, ServerRack 8000 Series, Width: 600 mm, Height: 42 U, with Combination Lock.
<b>LP-R807PFY645C</b>	Full Perforated external Door, ServerRack 8000 Series, Width: 600 mm, Height: 45 U, with Combination Lock.