


LP-R807PFY8XXS 8000 Series NetworkRack Cabinet Fully Perforated External Frame Doors with Swing Handle Lock

LPR807PFY8XXS_PFD_ENB01W

Features:

- **(PFY)** Perforate Frame door: fully perforated door frame with swing handle lock combine security and ventilation with 64% open area.
- Suitable for mixed equipment environments not generating excess heat.
- Excellent looks.
- Electrostatically painted.
- Internal equipment can be supervised through the glass.
- 800 mm width suitable for 8000 series NetworkRack.
- Can be installed so it can be opened left or right wise.
- Robust swing handle lock.

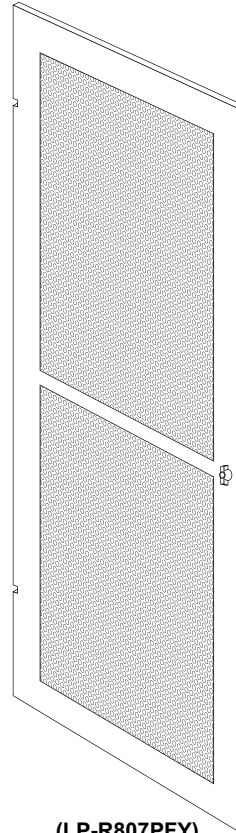

(LP-R807PFY)
Full Perforated
External Door



Note:
This picture shows a typical NetworkRack Cabinet door, the actual lock/handle mechanism can vary from that shown.

LP-R807PFY8XXS 8000 Series NetworkRack Cabinet Fully Perforated External Frame Doors with Swing Handle Lock

The **LP-R807PFY8XXS** Fully Perforated External Frame Doors for 8000 Series NetworkRacks with Swing Handle Lock, combine security and ventilation and is suitable for mixed equipment environments not generating excess heat.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend the combination of Fully Perforated front and rear doors. This configuration allows the maximum front to rear air flow through the cabinet.

A Specifications:

8000 Series Model No.	LP-R807PFY8XXS Fully Perforated External Frame Doors with Swing Handle Lock
Standards Compliance	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
Material (main)	<ul style="list-style-type: none"> ● SPCC cold rolled steel ● Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm
Width	800 mm for 8000 Series NetworkRack Cabinets
Heights	27 U, 39 U, 42 U and 45 U
Type of door	PFY Fully Perforated External Frame achieves 64% open area
Surface treatment	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
Surface finish	Static paint powder coat, Color: Ral9004, RAI7044
Degree of protection	IP20
Code lock	Optional, available with 3 digit code
Swing Handle	UL-94HB rated

B How to Order:

- LP-R807PFY827S** 8000 Series NetworkRack Cabinet Fully Perforated External Frame Door with Swing Handle Lock, Width: 800 mm, Height: 27 U.
- LP-R807PFY839S** 8000 Series NetworkRack Cabinet Fully Perforated External Frame Door with Swing Handle Lock, Width: 800 mm, Height: 39 U.
- LP-R807PFY842S** 8000 Series NetworkRack Cabinet Fully Perforated External Frame Door with Swing Handle Lock, Width: 800 mm, Height: 42 U.
- LP-R807PFY845S** 8000 Series NetworkRack Cabinet Fully Perforated External Frame Door with Swing Handle Lock, Width: 800 mm, Height: 45 U.