


## LP-R807PSY6XXC 8000 Series ServerRack cabinet plain external solid doors with combination lock

LPR807PSY6XXC\_PFD\_ENB01W

### Features:

- Plain external solid door.
- Require forced ventilation in order to manage excess heat.
- Excellent looks.
- Electrostatic painted.
- 600 mm width suitable for 8000 Series ServerRacks.
- Can be installed so it can be opened left or right wise.
- With 3 digits combination lock.

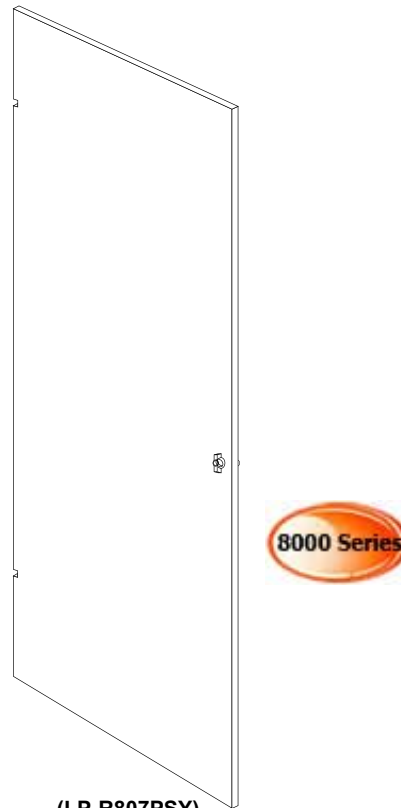

(LP-R807PSY)  
Plain External  
Solid Door

### LP-R807PSY6XXC 8000 Series ServerRack cabinet plain external solid doors with 3 digits combination lock

The **LP-R807PSY6XXC** Plain External Solid Doors for 8000 Series ServerRacks with 3 digits combination locks, deliver maximum security but require forced ventilation to manage heat and maintain secure temperatures for equipment.

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend use of forced ventilation.



**A Specifications:**

<b>8000 Series Model No.</b>	<b>LP-R807PSY6XXC</b> Plain external solid doors with 3 digits combination lock
<b>Standards Compliance</b>	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
<b>Material (main)</b>	<ul style="list-style-type: none"> <li>• SPCC cold rolled steel</li> <li>• Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm</li> </ul>
<b>Widths</b>	600 mm for 8000 Series ServerRack Cabinets
<b>Heights</b>	27 U, 39 U, 42 U and 45 U
<b>Type of door</b>	PSY Plain External Solid Doors
<b>Surface treatment</b>	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
<b>Surface finish</b>	Static paint powder coat, Color: RaI9004, RA17044
<b>Degree of protection</b>	IP20
<b>Code locks</b>	With 3 digits code combination lock

**B How to Order:**

<b>LP-R807PSY627C</b>	Plain external solid door, ServerRack 8000 Series, width: 600 mm, height: 27 U, with 3 digits combination lock.
<b>LP-R807PSY639C</b>	Plain external solid door, ServerRack 8000 Series, width: 600 mm, height: 39 U, with 3 digits combination lock.
<b>LP-R807PSY642C</b>	Plain external solid door, ServerRack 8000 Series, width: 600 mm, height: 42 U, with 3 digits combination lock.
<b>LP-R807PSY645C</b>	Plain external solid door, ServerRack 8000 Series, width: 600 mm, height: 45 U, with 3 digits combination lock.