
LP-R807PSY6XXS 8000 Series ServerRack Cabinet Plain External Solid Doors with Swing Handle lock

LPR807PSY6XXS_PFD_ENB01W

Features:

- (PSY) Plain External Solid Door
- Require forced ventilation in order to manage excess heat.
- Excellent looks.
- Electrostatic painted.
- 600 mm width suitable for 8000 Series ServerRacks.
- Can be installed so it can be opened left or right wise.
- Swing handle lock.

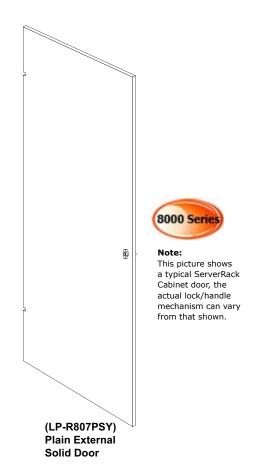

LP-R807PSY6XXS 8000 Series ServerRack Cabinet Plain External Solid Doors with Swing Handle lock

The **LP-R807PSY6XXS** Plain External Solid Doors for 8000 Series ServerRacks with swing handle locks, deliver maximum security but require forced ventilation to manage heat and maintain secure temperatures for equipment

The biggest challenge facing many IT managers today is how to keep their rack mounted equipment cool. To support this objective, we recommend use of forced ventilation.



Specifications:

8000 Series Model No.	LP-R807PSY6XXS Plain External Solid Doors with Swing Handle Lock
Standards Compliance	ANSI/EIA RS-310-D, IEC297-2, DIN41494 Part 1, DIN41494 PART 7, GB/T3047, 2.92, RoHS
Material (main)	 SPCC cold rolled steel Thickness of Steel: mounting profile: 2.0 mm, others: 1.2 mm
Width	600 mm for 8000 Series ServerRack Cabinets
Heights	27 U, 39 U, 42 U and 45 U
Type of door	PSY Plain External Solid Doors
Surface treatment	Surface: degreasing, acid pickling, phosphoric, dip-coat primed
Surface finish	Static paint powder coat, Color: Ral9004, RAl7044
Degree of protection	IP20
Swing Handle Lock	UL-94HB Rated

How to Order:

LP-R807PSY627S	8000 Series ServerRack Cabinet Plain External Solid Door with Swing Handle lock, Width: 600 mm, Height: 27 U
LP-R807PSY639S	8000 Series ServerRack Cabinet Plain External Solid Door with Swing Handle lock, Width: 600 mm, Height: 39 U
LP-R807PSY642S	8000 Series ServerRack Cabinet Plain External Solid Door with Swing Handle lock, Width: 600 mm, Height: 42 U
LP-R807PSY645S	8000 Series ServerRack Cabinet Plain External Solid Door with Swing Handle lock, Width: 600 mm, Height: 45 U