

LP-RU07107PDU Horizontal 19" Rack-Mounted Protected Power Distribution Unit, with seven (7) NEMA 5-15R, 125 VAC, 50/60 Hz Outlets, 15 A Thermomagnetic Surge and Overcurrent Protection and a 6000 Ampere Interrupting Capacity.

LPRU07107PDU_SS_ENB01W



LP-RU07107PDU

Horizontal 19" Rack-Mounted Protected Power Distribution Unit, with seven (7) NEMA 5-15R, 125 VAC, 50/60 Hz Outlets, 15 A Thermomagnetic Surge and Overcurrent Protection and a 6000 Ampere Interrupting Capacity.

This Heavy Duty Aluminum Body Power Distribution Unit, with seven (7) NEMA 5-15R outlets, 125 VAC, 50/60 Hz, maximum working current of 15 A, 1875 W of maximum output power, protected with a 15 A, 6000 A interrupting capacity thermomagnetic breaker switch with finger guard avoids accidental shut-down of the load. Indicator light.


Width 19", height: 1½ U, and a 3 m 3x AWG#16 grounded power cord terminated with a NEMA 5-15P plug. Operating temperature range: -20 to +60 degrees Celsius.

Applications

- The LanPro Universal Series LP-RU07107PDU is an excellent choice for applications needing a feeder in the back or front of large cabinets and racks.

PDU Horizontal Installation

Figure 1

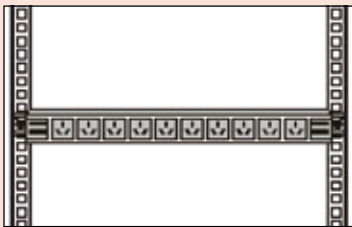

A Thermomagnetic Breaker Switch

The **LP-RU07107PDU** Power Distribution Unit includes a very tough circuit breaker with cover guard to avoid accidental power failure, with 6000 A interrupting capacity.

Figure 2



B Specifications

Electrical Characteristics	Value
Maximum power	1875 W
Voltage service rating	Up to 125 VAC
Operating temperature range	-20 to +60 degrees Celsius
Thermomagnetic current breaker	15 A @125 VAC
Breaker current peak interrupting capacity	6000 A
Cable size and length	10 ft (3 m) AWG#16 Phase , Neutral, Gnd with NEMA 5-15P
Mechanical Characteristics	Value
Number of outlets	Seven (7)
Construction	Heavy duty anodized aluminum enclosure
Mounting	Horizontal
Length	19 inches
Height	1.5 U (U=rack units)

C How to Order**LP-RU07107PDU**

Heavy Duty Aluminum Body Power Distribution Unit, seven (7) NEMA 5-15R outlets, 125 VAC, 50/60 Hz, maximum working current of 15 A, 1875 W of maximum output power, protected with a 15 A, 6000 A interrupting capacity thermomagnetic breaker switch with finger guard, indicator light. Width: 19", height: 1½ U, and a 3 m 3x AWG#16 grounded power cord terminated with a NEMA 5-15P plug.

LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.