LP-F2324048BK16 Fiber optic Terminal Box with for 48 fiber splicing, can load 16 pcs SC simplex adapters

LPF2324048BK16_SS_ENB01W

Features

- Material: PP+GF.
- 4pcs fiber optic splice trays, each 12 fibers; 48 fibers (Max. can load 4 pcs tray for 48 fiber splicing).
- Can load 16 pcs SC simplex adapters.
- Each splice tray can put 1pc1:8 PLC steel tube for splitter.
- 4pcs Φ18mm entry cable ports and 16 pcs 3mm drop cable ports.
- Wall mounting and pole mounting application.
- Waterproof, outdoor using.

Applications

- FTTH access network.
- Telecommunication networks.
- CATV networks.
- Data communications networks.



LP-F2324048BK16 Fiber optic Terminal Box with for 48 fiber splicing, can load 16 pcs SC simplex adapters


The **LP-F2324048BK16** Fiber optic terminal box is suitable for optical fiber splicing, distribution and protection. It is reasonable design for fiber arrangement, and for outdoor wall mounted and pole mounted applications.



Specifications

Capacity	Dimensions	Adapter port
48 fibers	411.5 x 243 x 143mm	Max. 16pcs SC simplex adapters

Dimensions (mm):

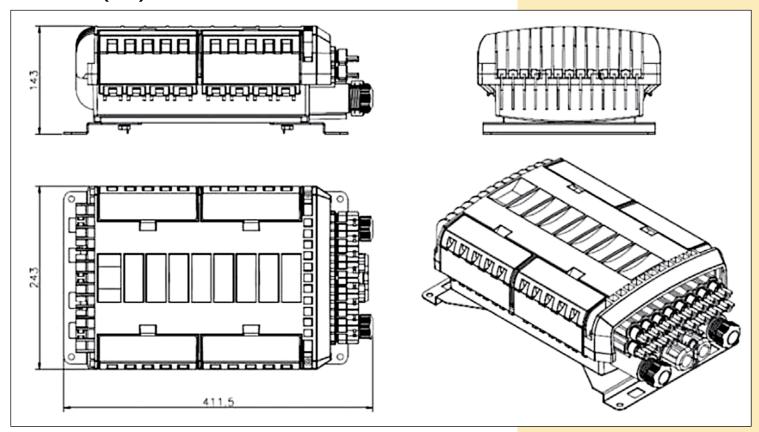

B How to order

LP-F2324048BK16 Fiber optic Terminal Box with for 48 fiber splicing, can load 16 pcs SC simplex adapters.