

LP-OC52120124ZC Fiber Optical Cable with 12 singlemode ITU-T G.652.D B1.3 9/125, full spectrum and low water peak, Loose Tubes, Single PE Jacket, corrugated steel tape, central strength member FRP, Dry water Blocking tape and Ripcord

LPOC52120124ZC_SS_ENB01W

Features:

- Loose tube gel-filled construction for superior fiber protection.
- UV- and moisture-resistant design.
- Termite and rodent resistant construction.
- Dry Water Blocking tape with Ripcord.

Applications:

- Interbuilding voice or data communication backbones.
- Campus LAN, (CAN).
- Designed for rough conditions.
- Outside Plant usage.
- Usable lashed Aerial, ducted or direct burial.
- Junction type Communication Systems.
- Subscriber network systems.
- Local area network systems.
- Usable on long-haul applications.



Armadillo™


**LP-OC52120124ZC
Fiber Optical Cable with 12 singlemode ITU-T G.652.D
B1.3 9/125, full spectrum and low water peak,
Loose Tubes, Single PE Jacket, corrugated steel tape,
central strength member FRP,
Dry water Blocking tape and Ripcord**

The **LP-OC52120124ZC** Fiber Optic Cable by LanPro is what the industry calls an Outside Plant Cable, Corrugated Steel Tape armored for underground conduits or ducts or in aerial / lashed deployment for Outdoor applications.

Loose tube style, optical fiber cable light armored with corrugated steel tape, with non-metallic central strength member of FRP and dry water blocking tape with ripcord. The cable is protected by a black colored PE over sheath.

The tubes contain twelve (12) singlemode fibers color coded as per color coding scheme.

A Cable Section:

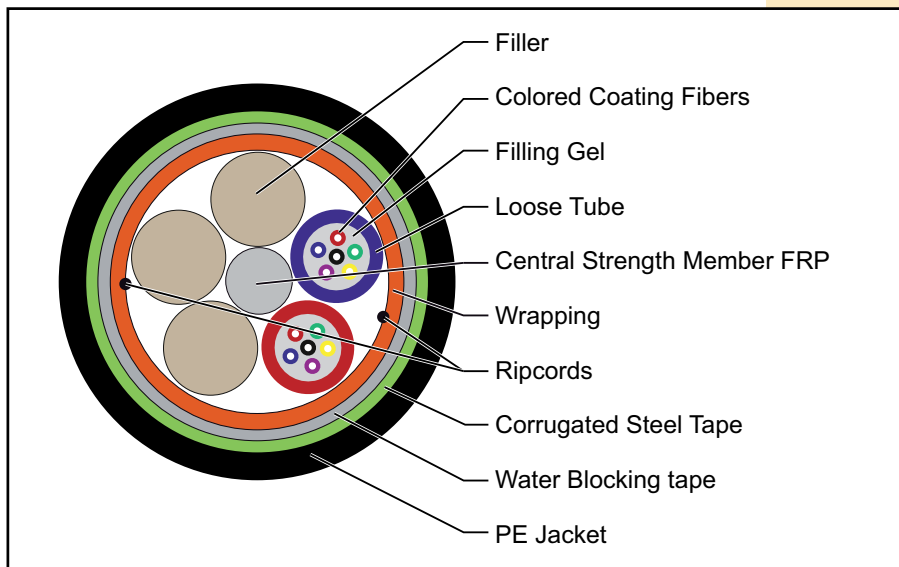

B Product Construction:

Fiber Count:

- 12 fibers.
- Loose tube gel-filled for moisture protection.
- Color-coding per TIA/EIA 598 B.

Central Strength Member:

- FRP (Fibre Reinforced Plastic) (A rod made of Epoxy/glass).

Water Blocking:

- Dry Water Block tape with Ripcord.

External Jacket:

- Black UV- and moisture-resistant polyethylene (PE).
- Sequential meter markings standard/ Footage optional.

Armor:

- Laminated Corrugated Steel Tape.

C Fiber Parameters:

No.	ITEMS	UNIT	SPECIFICATIONS G.652.D
1	Mode Field Diameter	1310 nm	9.2±0.4 µm
		1550 nm	10.4±0.5 µm
2	Cladding Diameter	µm	124.8±0.7
3	Cladding Non-Circularity	%	≤0.7
4	Core-Cladding Concentricity Error	µm	≤0.5
5	Coating Diameter	µm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	µm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _{cc} ≤1260
9	Attenuation (max.)	1310 nm	≤0.36 dB/km
		1550 nm	≤0.22 dB/km

D Cable Parameters:

Items		Specifications
Fiber Count		12
Colored Coating Fiber	Dimension	250 μm ± 15 μm
	Color	Blue, Orange, Green, Brown
Loose Tube	Dimension	1.95 mm ± 0.05 mm
	Material	PBT
	Color	Blue, Orange, Green
Central Strength Member	Diameter	1.95 ± 0.05 mm
	Material	FRP
Corrugated Steel Tape	Thickness	0.25 mm
Outer Jacket	Material	PE
	Color	Black
Cable	Dimension	10.3 mm ± 0.2 mm
	Weight	130.0 ± 5 kg/km

E Mechanical and Environmental Characteristics:

Items	Unit	Specifications
Tension (Long Term)	N	1000
Tension (Short Term)	N	1500
Crush (Long Term)	N/10cm	300
Crush (Short Term)	N/10cm	1000
Min. Bend Radius (Dynamic)	mm	20 x Diameter
Min. Bend Radius (Static)	mm	10 x Diameter
Installation Temperature	°C	-20~+60
Operating Temperature	°C	-40~+70
Storage Temperature	°C	-40~+70

F How to order:

LP-OC52120124ZC Fiber Optical Cable with 12 singlemode ITU-T G.652.D B1.3 9/125, full spectrum and low water peak, Loose Tubes, Single PE Jacket, corrugated steel tape, central strength member FRP, Dry water Blocking tape and Ripcord