

LP-PAR2429 2.4 GHz 29 dBi Parabolic Welded Reflector Grid Type Antenna.

LPPAR2429_SS_ENB01W

Features

- Small Size/Reduced Shipping Cost.
- 100 W Passive Feed Dipole.
- Aperture 5.3°.
- Type N-Female Connector 18" pigtail.
- 29 dBi Antenna Gain.
- Horizontal or Vertical Polarity.
- Rugged, and Waterproof.
- Heavy Duty Adjustable Tilt Bracket.
- 2-Piece Powder Coat Painted Galvanized Steel.
- Ideal for long range PTP systems.
- 2400 -2483 MHz ISM Band.
- IEEE 802.11b/g Wireless LAN.
- WiFi Systems & Long-range Directional.
- Wireless Bridges, Backhaul & Wireless Video Systems.



LP-PAR2429 2.4 GHz 29 dBi Parabolic Welded Reflector Grid Type Antenna.

The LP-PAR2429 is a directional antenna system with 29 dBi gain and 5.3° of beam-width for highly directional and long distance applications.


It is rugged and weatherproof and almost invisible to the bare eye. It incorporates a single piece UV powder coated steel parabolic grid type antenna reflector for strength and low wind-loading, comes with the PMPF, a patented 50-Ohm passive feed dipole and can be installed for horizontal or vertical polarization applications.

External interference is lowered due to its excellent F/B ratio. Installation is simple with the LanPro adjustable "Heavy Duty" bracket that comes standard and lets the installer to adjust tilt and swivel angles of up to 60 degrees. The bracket accommodates poles from 1.50" up to 3" OD. Brackets are 100% stainless steel for extreme corrosion protection and each reflector comes complete with stainless steel hardware and assembly instructions. Comes with a 0.45m (18") pigtail terminated in a N-female connector.

A Specifications

Model	LP-PAR2429
Frequency Range	2400-2483 MHz
Bandwidth	83 MHz
Gain	29 dBi
Horizontal Beamwidth	5.3°
Vertical Beamwidth	5.3°
F/B Ratio	>30dB
V.S.W.R.	<1.5:1 avg.
Nominal Impedance	50 Ohm
Polarization	Vertical or Horizontal
Max. Power	100 Watt
Lightning protection	DC Short
Connector	N Female
Dimensions (Diameter)	1.5m
Grid Material	Galvanized Steel UV Powder Painted
Weight	25 Kg
Mounting Mast Diameter (Max)	50-75mm
Wind Survival	134 Mph
Elevation Angle	0 to +15°
Operating Temperature	-40° C to 85° C , (-40° F to 185° F)

LP-PAR2429 Antenna Patterns

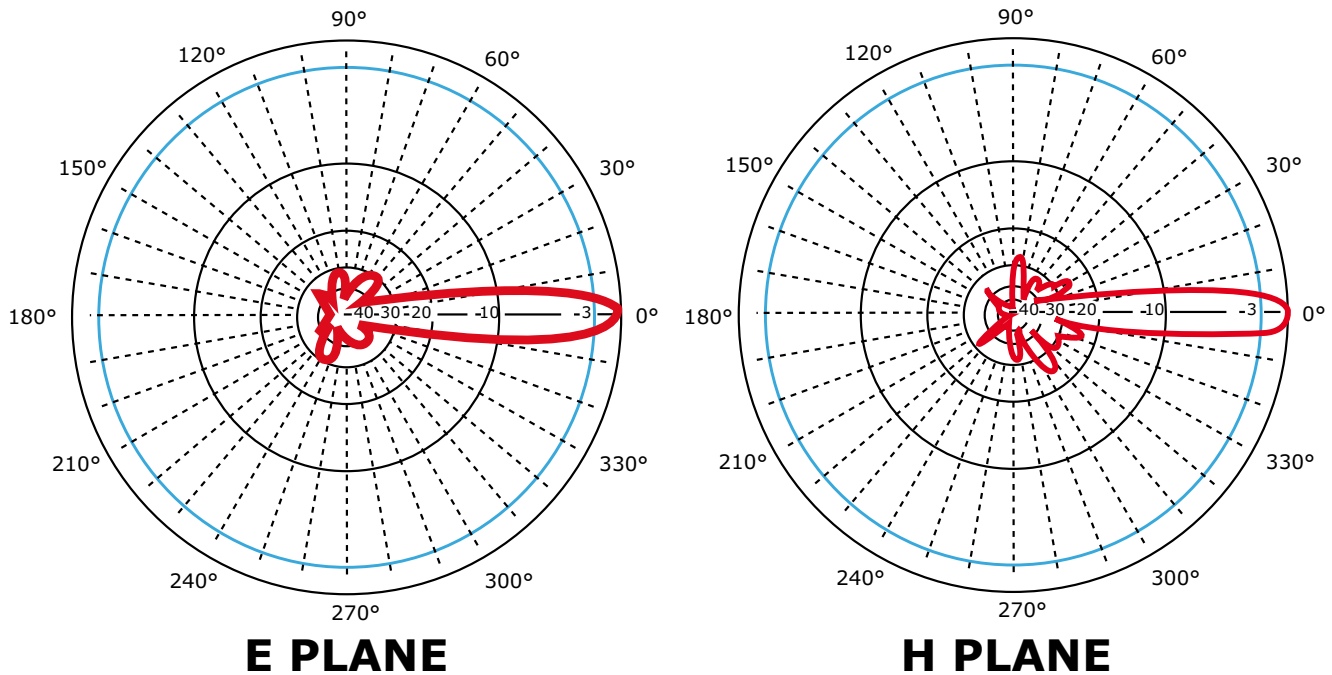

B How to Order

LP-PAR2429 2.4 GHz 29 dBi Parabolic Welded Reflector Grid Type Antenna.