

**User Manual LP-WR304 2.4 GHz Wireless N 300 Mbps broadband
high power router with 1 WAN port and 4 LAN ports**

LPWR304_UM_ENB01W




**User Manual
LP-WR304 2.4 GHz Wireless N 300 Mbps
broadband high power router with 1 WAN
port and 4 LAN ports**

A Hardware Installation

- **ADSL**, please comply with steps 1, 2, 3 and 4
- **Residential broadband**, please comply with steps 2, 3 and 4
- **Range extender**, please comply with steps 3 and 4



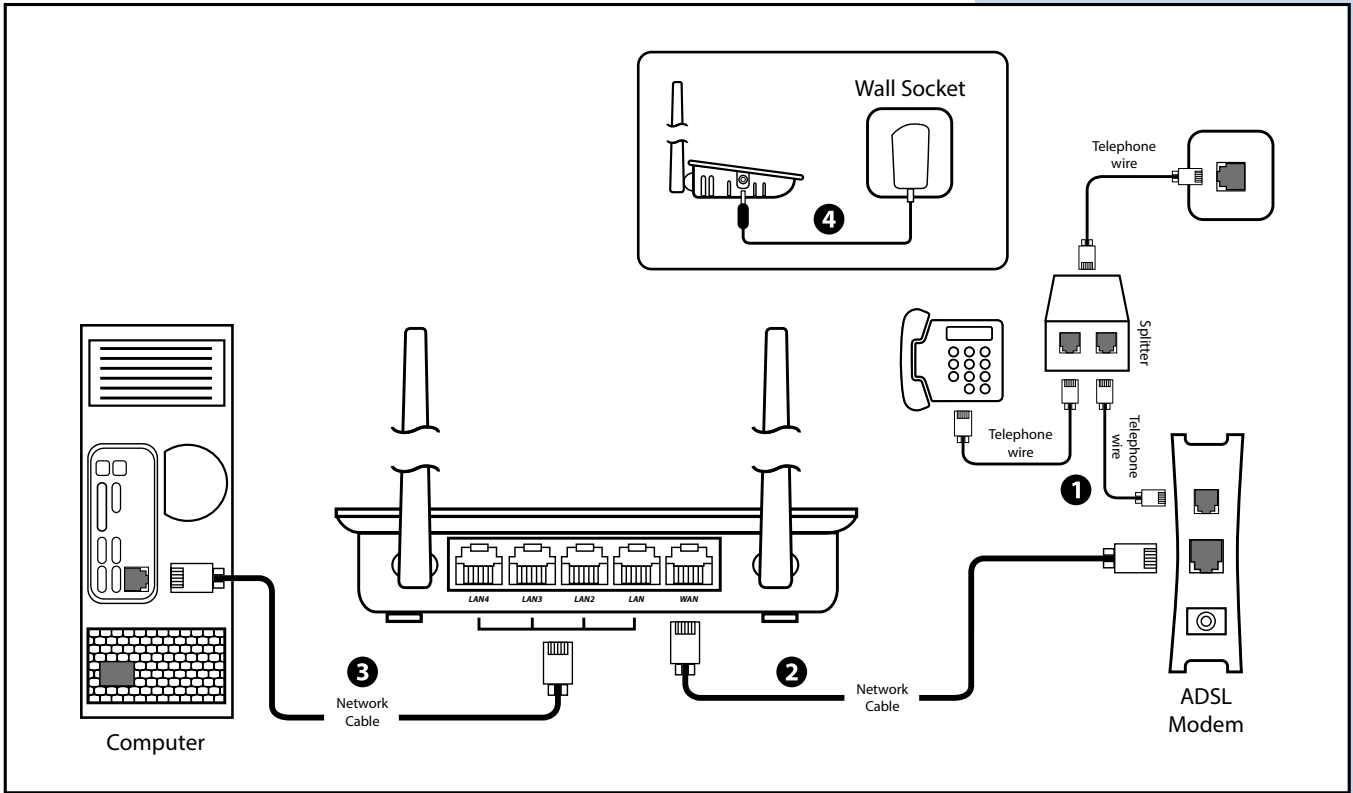


Note:


1. Please disconnect the power adapter and all cables during thunder storm weather
2. Keep away from heat source and keep well ventilated
3. Please pay attention to the waterproof and moisture proof when storing, transporting and running
4. The power adapter must be original or approved

B Set up PC Windows Vista/7/10


1. Right click Computer desktop lower right corner, **Network Connection Icon - Open Network & Internet settings**

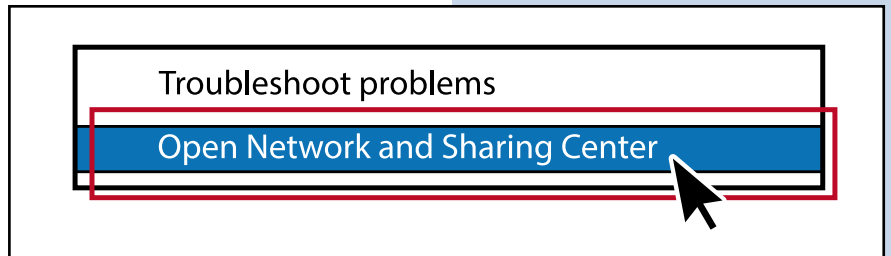


2. Click **Change adapter options** (page left)

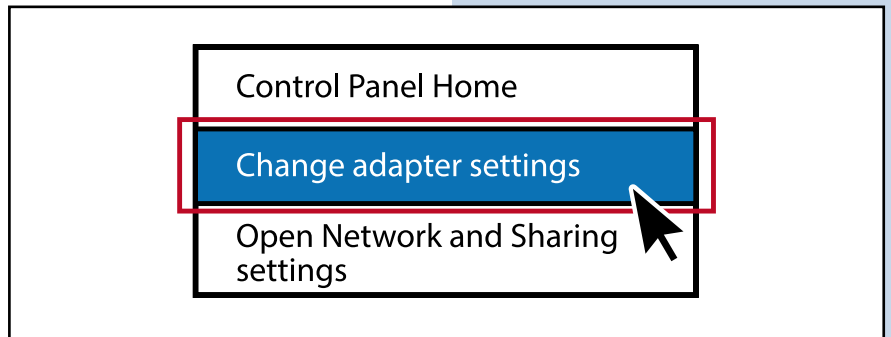


3. Right click **Local Area Connection** and choose **Properties**

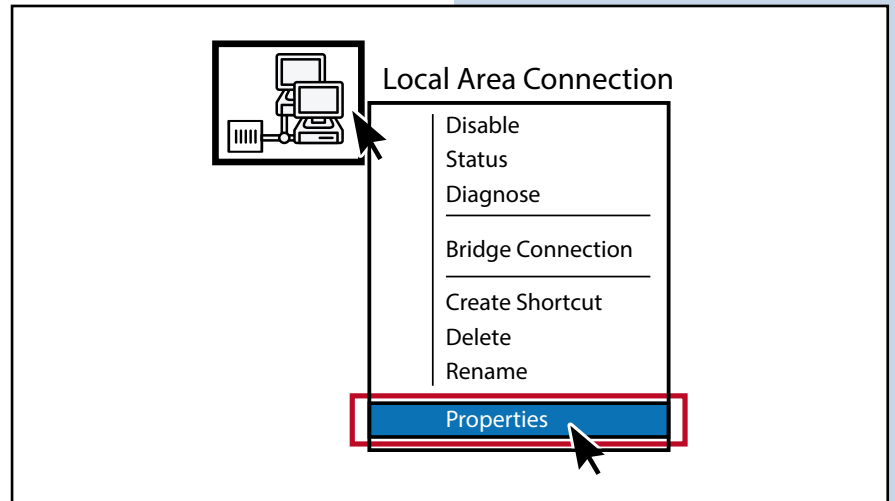

4. Double click **Internet Protocol Version 4 (TCP/IPv4)**

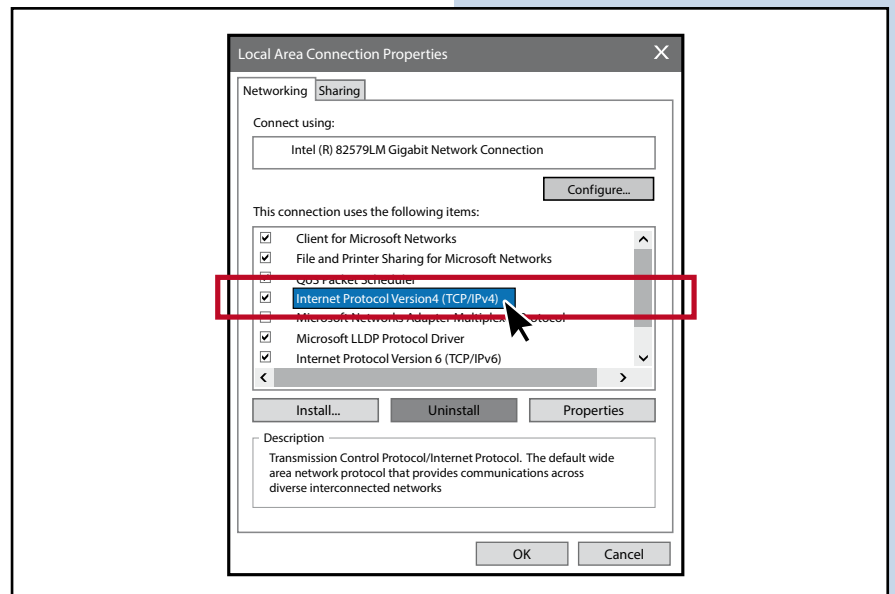


5. Choose **Obtain an IP address automatically** and Obtain **DNS server address automatically**, click **OK** and then click **OK**

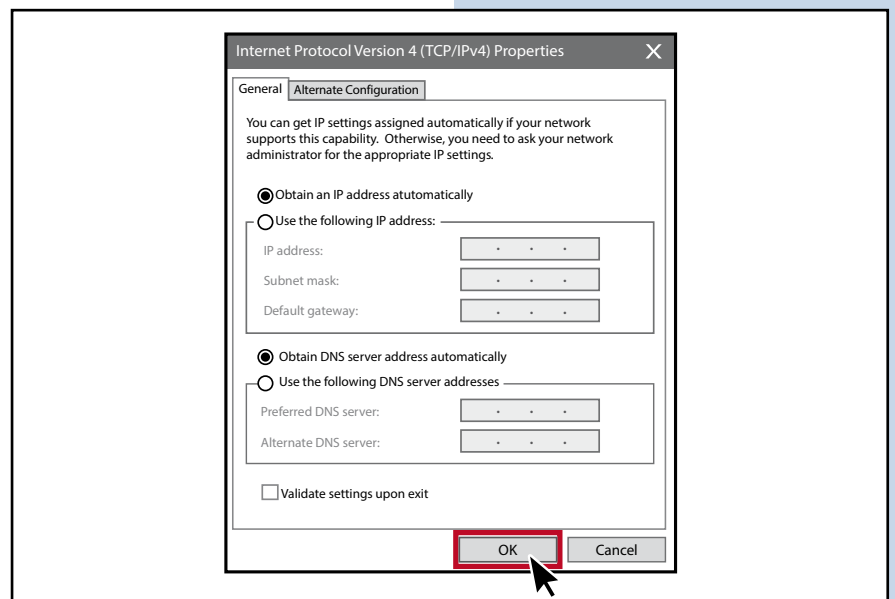


Set Up Router


- Run any web browser.
Type **192.168.1.1** in the web browser then press **Enter** key, enter User name and Password:
User name: admin
Password: admin

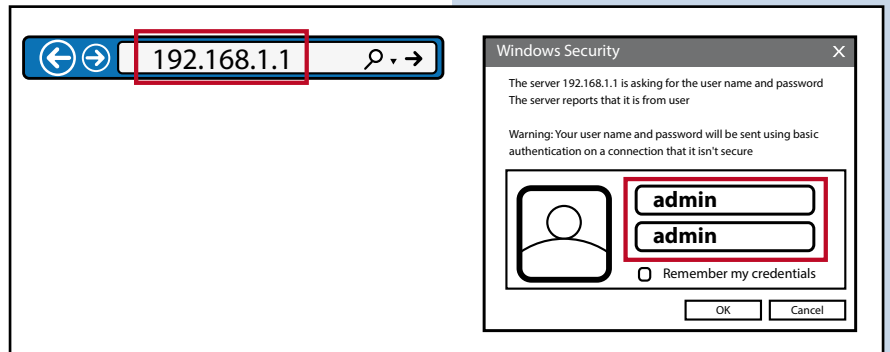


- Now you can see the **Easy Setup interface**

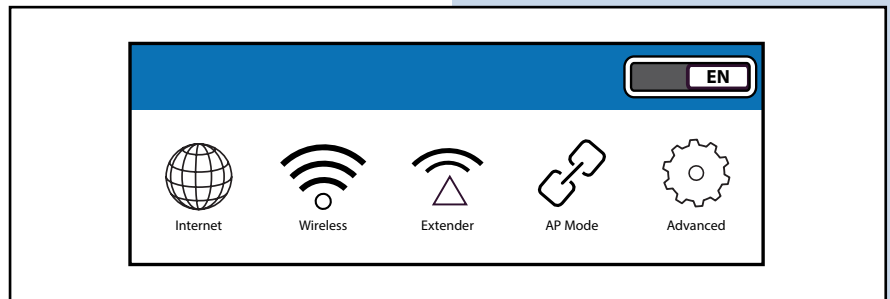


- PPPoE Mode: Click Internet>> PPPoE >>User Name >>Password,** then click **Apply**

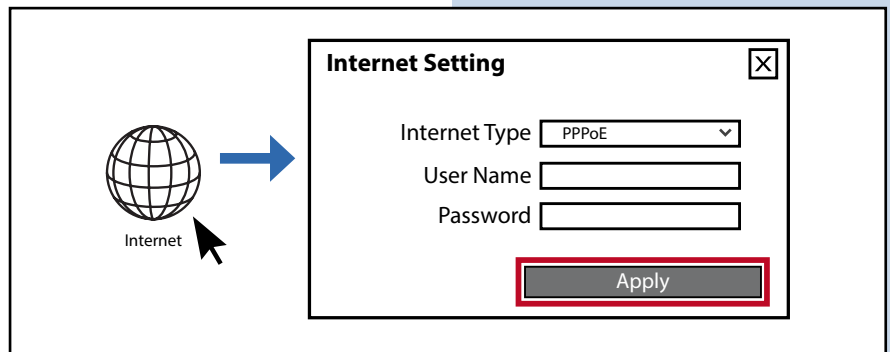


- Static IP Mode: Click Internet>> Static IP>> IP address>> Subnet Mask>> Gateway>> Primary DNS** as bellow, then click **Apply**

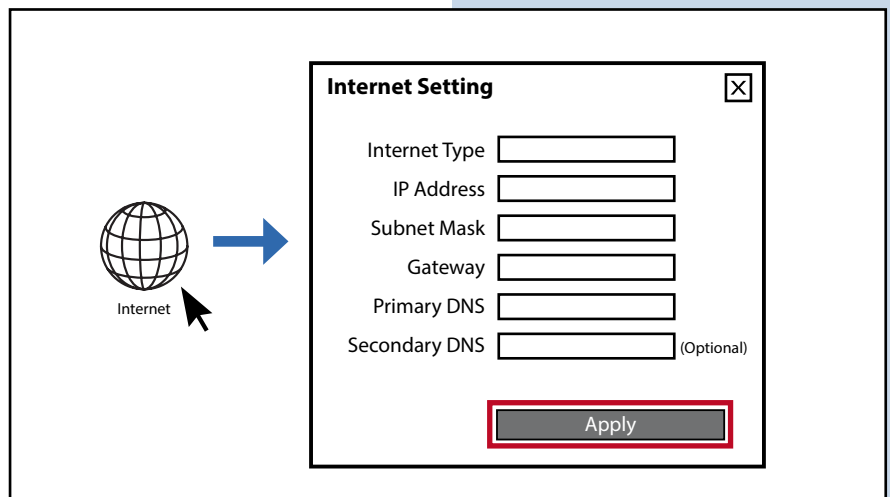


5. **Change the SSID and password:**
Click **Wireless>> SSID>> Security>> Password**, then click **Apply**

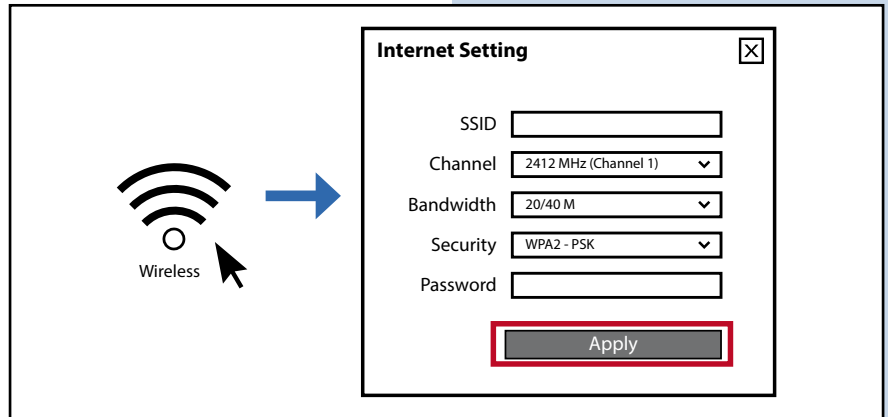

6. **Extender Mode:**
Click **Extender>> Scan**

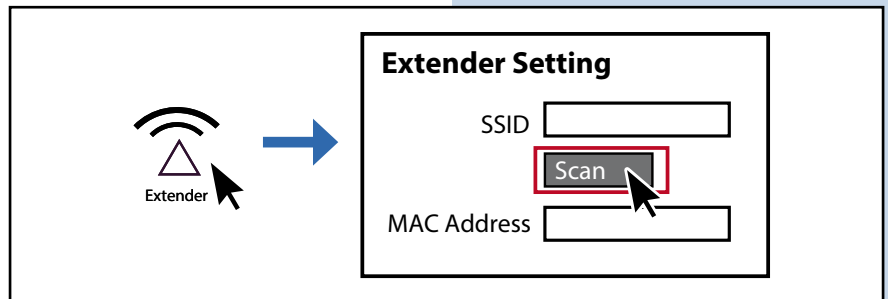

7. Select the SSID you want to repeat input the primary router's password then click **Apply**, the device will restart automatically.

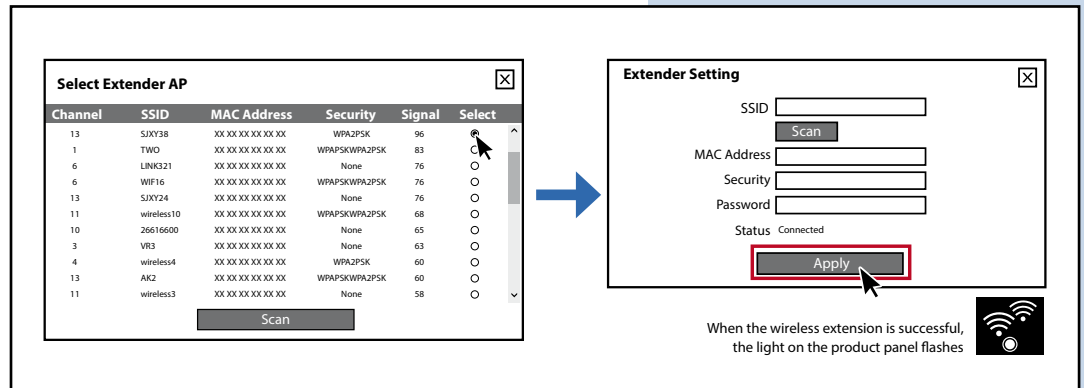

Note: After extender mode successfully, if you will find that you cannot get into the router again. That you set up the terminal device (laptop or mobile phone) IP address as fixed IP address: 192.168.1.x (x cannot be digital 1 (2-255)) Default Gateway: 192.168.1.1

Pattern setting steps

AP Mode
Ethernet cable to WAN port (make sure the primary router which the other head of Ethernet cable is connected to is available for internet)

Extender Mode (step 1, 5, 6)
PPPoE Mode (step 1, 5, 3)
Static IP Mode (step 1, 5, 4)
Change SSID and password (step 1, 5)