


L=0.5/1/2/3M
 MARCAJE: LANPRO NETWORKS INC. CAT 6 U/UTP 4P CM ISO/IEC11801 ANSI/TIA 568-C2. LOT XXXX

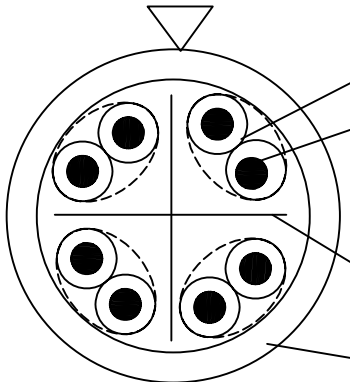

Conductor: 7/0.16±0.008 Cobre Puro
 Aislamiento: HDPE. IDØ 0.82±0.005mm blanco/azul+azul; blanco/naranja+naranja; blanco/verde+verde; blanco/marron+marron; 4 pares
 Relleno: PE
 Chaqueta: PVC (CM) OD:5.5±0.2MM

P1	P2
1	1 BLANCO/NARANJA
2	2 NARANJA
3	3 BLANCO/VERDE
6	6 VERDE
4	4 AZUL
5	5 BLANCO/AZUL
7	7 BLANCO/MARRON
8	8 MARRON

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	16.DEC.2004	YL	 LANPRO Connect-and-Forget
	CHECK	16.DEC.2004	KC	
	APPROVAL	16.DEC.2004	GR	
		DATE	NAME	
SCALE	1/5 (A4)	UNIT	mm	DES.: Patch cord para Centro de Datos CAT 6 U/UTP de alta densidad, sin blindaje, tipo Clear, AWG 26, con chaqueta clasificada CM.
	DRAWING NO.	LP4C6DUCXX_DD_SPB01W		
	DRAWING CLASSIFICATION	S	SHEET	1 OF 1