

LP-R704035XX
WallRack OpenFrame 7000 Series, 502 mm width, 330 mm depth, 6, 9 and 12 U heights.

LPR704035XX_SS_ENB01W

Features:

- Simple and fast installation.
- Dimensions: 502 mm width, 330 mm depth, 6, 9 or 12 U height.
- Manufactured with 2 mm gauge heavy duty steel.
- Electrostatic black color painted makes a durable and neat looking product.
- Conforms to EIA-310-D.
- 1U shelves available: LP-R707LS3151U.
- Ample cable access openings at sides: diameter 60mm.
- Large punch out at rear panel for power and signal access if needed.
- Numerous cable tie off pints provided.



LP-R704035XX
WallRack OpenFrame 7000 Series,
502 mm width, 330 mm depth,
6, 9 and 12 U heights.

The ideal solution for cable and patch panel installations, our 7000 Series wall-mount OpenFrame (OF) series is both a space and budget saver.


The open architecture and hinged front mounting angle allows for maximum access.

Manufactured with 2 mm Gauge steel and electrostatic black color painted makes a durable and neat looking product.

It has ample cable access openings at sides with a diameter of 60 mm, and a large punch out at rear panel for power and signal access if needed.

Numerous cable tie off points provided for securing the cabling.

A Drawing (Typical):

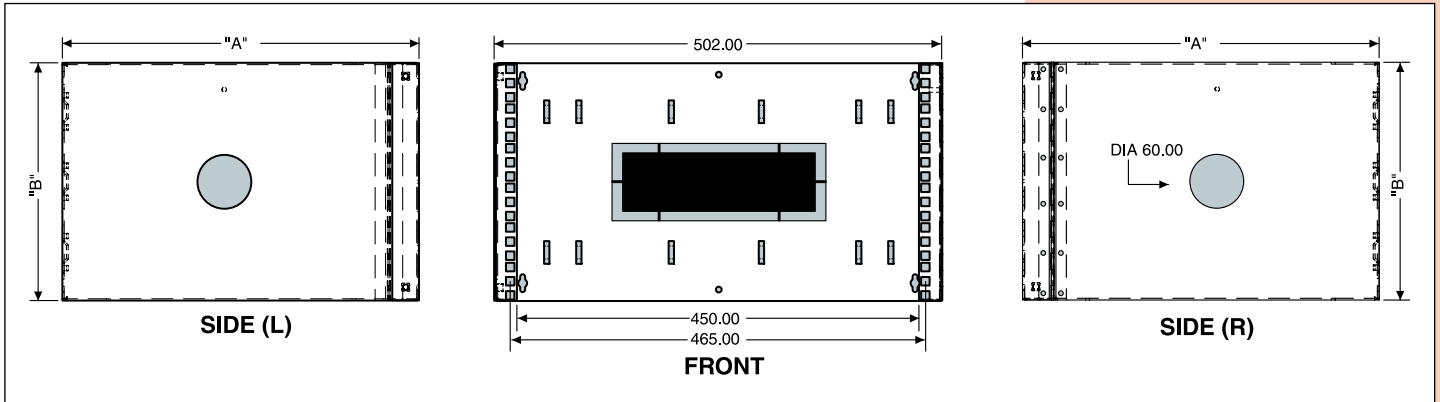

B Specifications:

Series	7000
Type	OpenFrame WallRack
Width	502 mm
Center to center front screws	450 mm
Depth	330 mm
Height	6, 9 or 12 U
Capacity	6 to 12 1 U devices
Material	2 mm gauge steel
Finish	Electrostatic black color painted
Wall Mounting	Holes on back panel
Equipment mounting	Right side swing front

C How to Order:

- LP-R70403506** WallRack OpenFrame 7000 Series, 502 mm width, 330 mm depth, 6 U height.
- LP-R70403509** WallRack OpenFrame 7000 Series, 502 mm width, 330 mm depth, 9 U height.
- LP-R70403512** WallRack OpenFrame 7000 Series, 502 mm width, 330 mm depth, 12 U height.

LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.