LPF13L10L1081L3M
Duplex Optical Patch Cord LC Duplex UPC polish RL>50dB to LC Duplex UPC polish RL>50dB, Multimode OM4 50/125um, 2.0mm, LSZH Aqua color jacket, 3m length.


LPF13L10L1081L3M_SS_ENB01W

Features

- Low insertion loss and back reflection loss.
- Excellent mechanical endurance.
- Good in repeatability.
- Tight-buffered cable.
- 20/10D min. Bend Radius.
- LSZH rated outer jacket.
- 0.3dB Low Insertion Loss.

Application

- Telecommunications.
- CATV, LAN, MAN, WAN, Test &Measurement.
- Military industry.
- Medical.

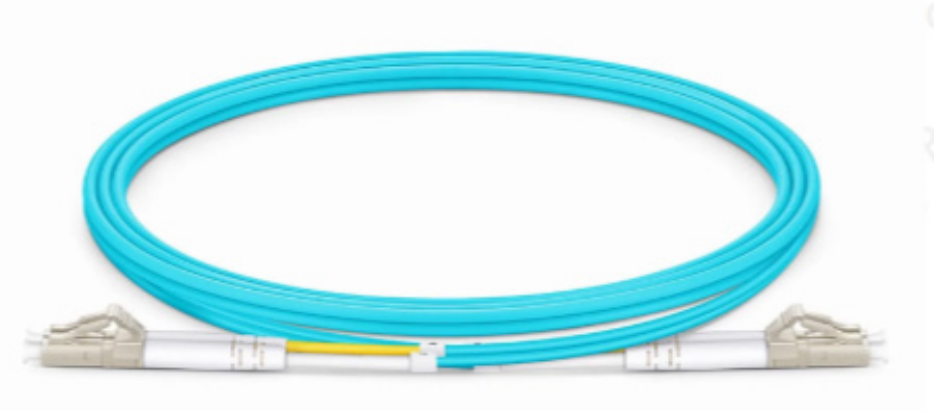

LPF13L10L1081L3M
Duplex Optical Patch Cord LC Duplex UPC polish RL>50dB to LC Duplex UPC polish RL>50dB, Multimode OM4 50/125um, 2.0mm, LSZH Aqua color jacket, 3m length.

LanPro's Fiber patch cords facilitate the interconnection and cross-connection of applications throughout data centers, telecommunications networks, and corporate environments. Pre-terminated cables enable the deployment of comprehensive plug-and-play solutions, allowing for the rapid installation of even extensive cabling infrastructure.

This OM4 fiber patch cord is particularly well-suited for high-speed, short-distance Ethernet applications, including 10/40/100G networks. It provides superior bandwidth capacity and extended transmission range in comparison to OM3 technology.

The bend-insensitive fiber patch cable exhibits reduced signal loss when subjected to bending or twisting compared to conventional optical fiber cables, thereby streamlining the installation and maintenance processes for fiber optic systems.

Parameter	Unit	Standard & requirement	
		UPC (MM)	
Insertion Loss (Typical)	dB	≤0.3	
Return Loss	dB	≥30	
Attenuation	dB/km	850nm	1300nm
		≤3.5	≤1.5
Durability	Time	>1000	
Operating Temperature	°C	-10 to 70°C	
Storage Temperature	°C	-20 to 70°C	
Cable Diameter	mm	Φ2.0	

A How to order

LP-F13L10L1081L3M	**Duplex Optical Patch Cord LC Duplex UPC polish RL>50dB to LC Duplex UPC polish RL>50dB, Multimode OM4 50/125um, 2.0mm, LSZH Aqua color jacket, 3m length.**

Lanpro is continuously improving its products and reserves the right to change specifications and availability without prior notice.