


LP-F181AIV00 12 Ports Wall Mounted Optical Distribution Frame (ODF), unloaded ivory color. Unifiber™ Series

LPF181AIV00_SS_ENB01W

Features

- Small wall-mount housing for pre-term or field term; Minimal mounting space required; Box-in-a-Box.
- Metal housing; Durability with better label adhesion.
- Cable and fiber management; protection.
- DIN Rail Mountable; Versatile mounting options Unifiber™ Solutions Complexity reduction and adapter panel availability.

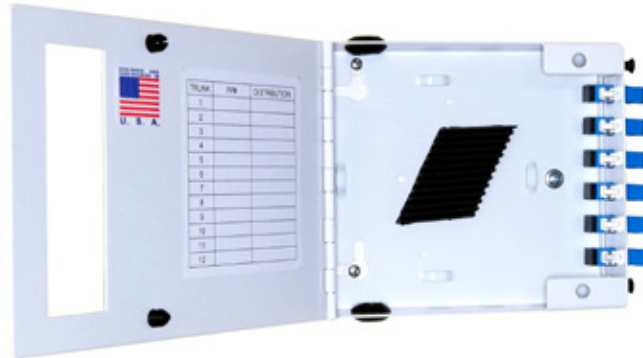

LP-F181AIV00 12 Ports Wall Mounted Optical Distribution Frame (ODF), unloaded ivory color. Unifiber™ Series

LanPro's single -panel housing is a cost -effective option for storage, protection and termination of optical fiber cables in applications with minimal mounting space. The housing accepts standard Unifiber™ solution connector panels and offers protection for the fiber cable and connectors for indoor wall -mount installations. This compact unit has frontal projection and is optimized for use in locations such as Box -in -a -Box applications, building entrances, terminals, wiring closets, open office and other areas where space is a premium. The built -in splice tray with routing guides provide both protection and segregation of the cable and fiber during initial install and any future MAC work that is needed. The durable metal housing can be used for splice management, cross -connect or both for up to 12 single fiber heat -shrink splices, and the improved splice organizer will also handle six ribbon heat -shrink splices if so desired. The single -panel housing can be mounted in multiple orientations including a DIN rail mounting option to allow fiber protection and connectivity in electronic and/ or control cabinet applications as well as standard wall mounting.



A Specifications

General Specifications


Application	Enterprise Networks
Mounting Type	Wall-Mountable

Design - Hardware

Housing Color	Ivory
Number of Panels per Housing	1
Splice Tray Options	Includes a 6-slot, 0.4-in splice holder which accommodates up to 12 heat-shrink single splices (double-stacked) and/or six heat-shrink ribbon splices

Mechanical Characteristics

Dimensions (HxWxD)	160mmx140mmx45mm (excluding guard)
---------------------------	------------------------------------

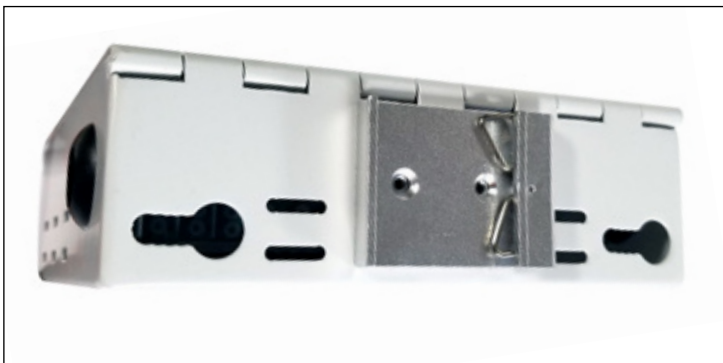

B How to Order

LP-F181AIV00 12 Ports Wall Mounted Optical Distribution Frame (ODF), unloaded and ivory color. Unifiber™ Series.