

LPT-FCLEAVA05 Optic High Precision Cleaver

LPTFCLEAVA05_SS_ENB01W

Features

- Auto slide back blade support
Simple and accurate operation.
- Stable and accurate cleave
angle distribution (>0.5).
- Guaranteed 48,000 cleaving
long lifespan Blade.
- Simple drop down Trash can.
- Suitable size and weight
for stable working condition.
- Multi holder (Flat, 250um,
900um, 3mm) support various
cleaving process.




LPT-FCLEAVA05 Optic High Precision Cleaver

LPT-FCLEAVA05 is high precision optical fiber cleaver which can support various fiber type (Flat, 250um, 900um, 3mm). Simplified two step cleaving technology gives rapid and accurate cleave angle. Also guaranteed durable blade support 48,000 cleaving.

LPT-FCLEAVA05 fiber cleaver is best model to satisfy maintenance and cost efficiency.

A Specifications

Applicable optical fiber	Silica optical fiber
Fiber Count	Single
Cladding Diameter	125um
Cleaving length	5mm to 20mm (coating diameter=250um)
Coating Diameter	0.16 to 0.9mm, 2 to 3 mm cord and drop cable
Cleaving angle	0.5°
Blade Life	48000 fibers (1000 fibers x 16 positions x 3 height)
Dimensions/Weight	65W x 75D x 60H (mm) / 350g
Operation condition	0 to 95% RH and -20 to 50°C (non-dew)

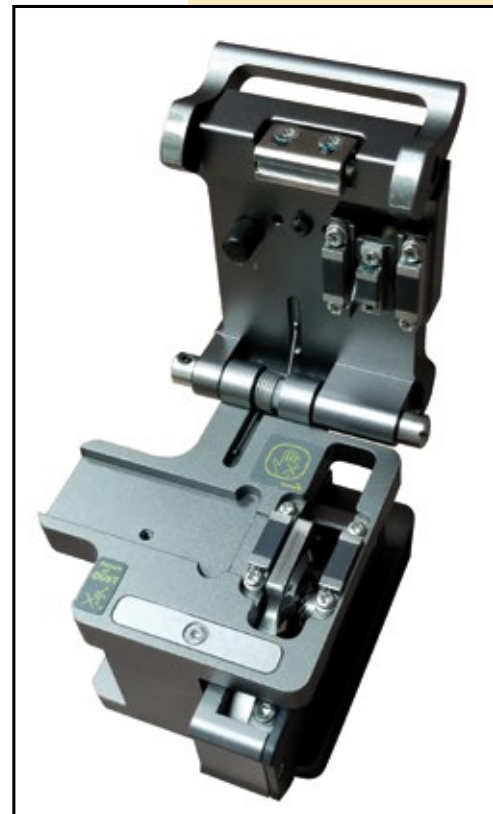

B How to Order

LPT-FCLEAVA05 Fiber Optic High Precision Cleaver

LanPro is continuously improving its products and reserves the right to change specifications and availability without prior notice.