

123 Manual, LP-1521 Broadband AP Router. Configuration URL Control.

LP1521_M123_ENR01W



**123 Manual, LP-1521
Broadband AP Router.
URL Control Configuration.
(You must configure the LP-1521
in AP/Router mode, for which you have to
use the LP1521_M123_ENC01.pdf Manual)**



1

Open the web browser and type the IP **http://192.168.1.254** (for this example), as shown in **Figure 1**.




Figure 1

2

In case the LP-1521 requests user authentication type **admin** and **password** in user and password respectively (by default) and select **OK**, as shown in **Figure 2**.



Figure 2

3

Select **Firewall** and then **URL Filtering**, as shown in **Figure 3**.


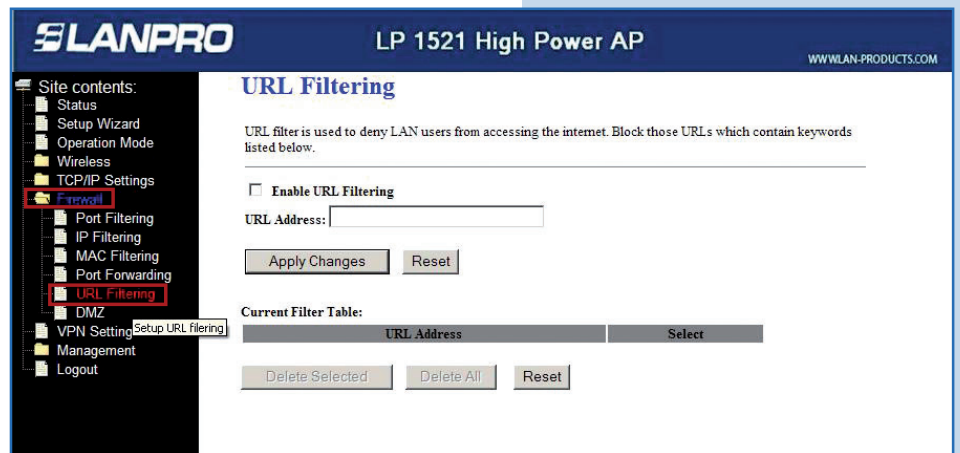


Figure 3

4

Check the box to enable the **URL Filtering** and select **Apply Changes**, as shown in **Figure 4**.


Figure 4

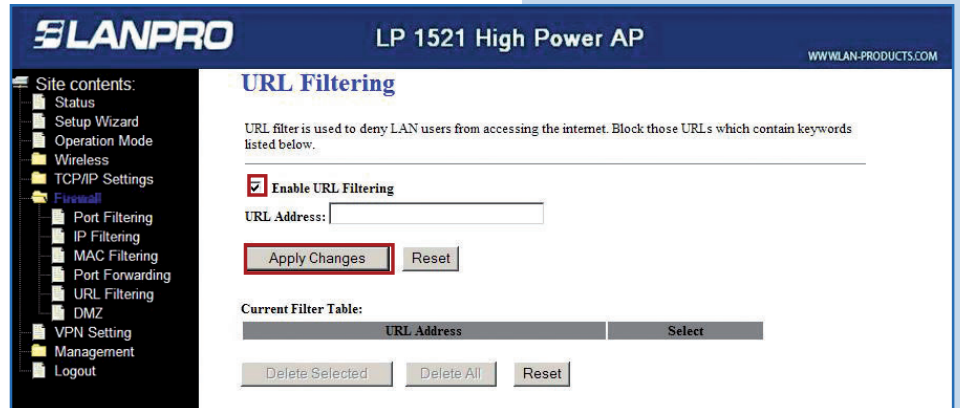

5

Proceed to enter the key words of the URL of the pages to be blocked. The LP-1521 only allows you to add the pages to be denied. Once you have entered the key word select **Apply Changes**, as shown in **Figure 5**. The maximum number of key words for the LP-1521 is 8.

Figure 5

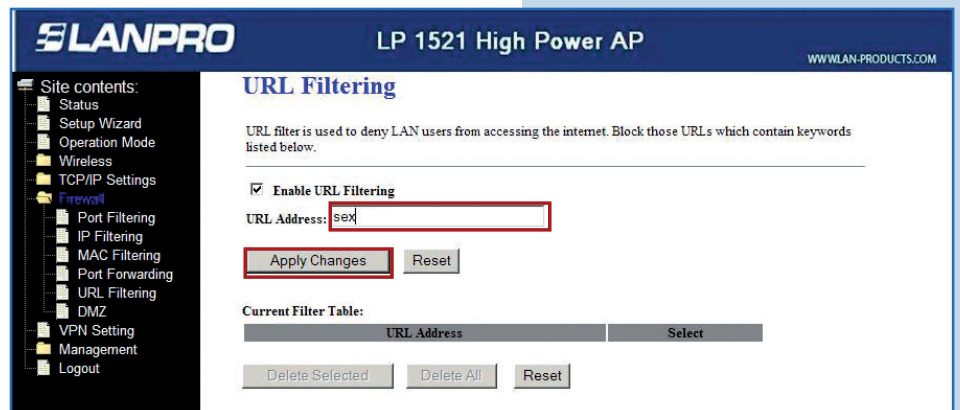

6

Note in **Figure 6** how the key words to be blocked remain added.

Figure 6

